

FIG. 1

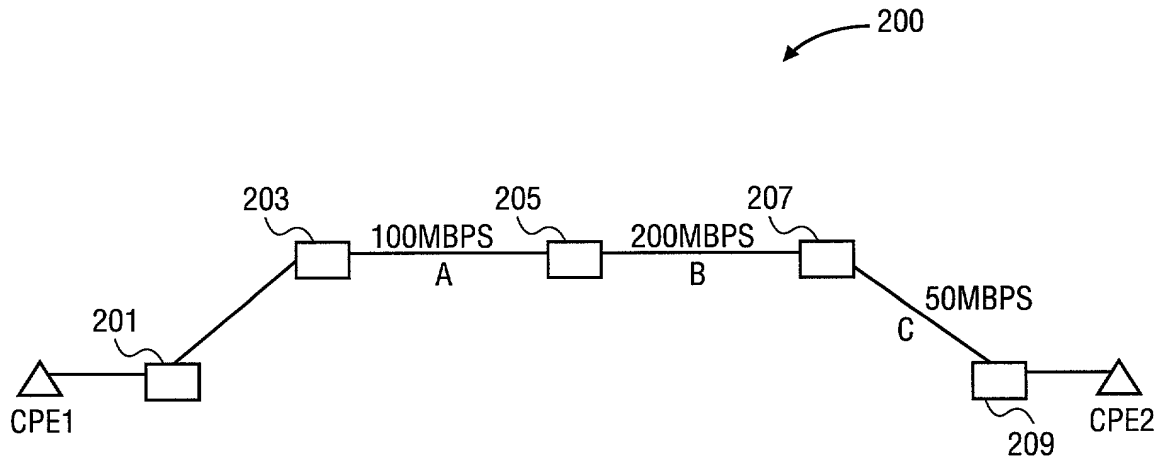


FIG. 2A

LINK	100% ALLOCATION FOR CALL 1 (NO OVERBOOKING)	10% ALLOCATION FOR CALL 1	50% ALLOCATION FOR CALL 2
LINK A 100MBPS CAPACITY	10/90	1/99	5/94
LINK B 200MBPS CAPACITY	10/190	1/199	5/194
LINK C 50MBPS CAPACITY	10/40	1/49	5/44

FIG. 2B


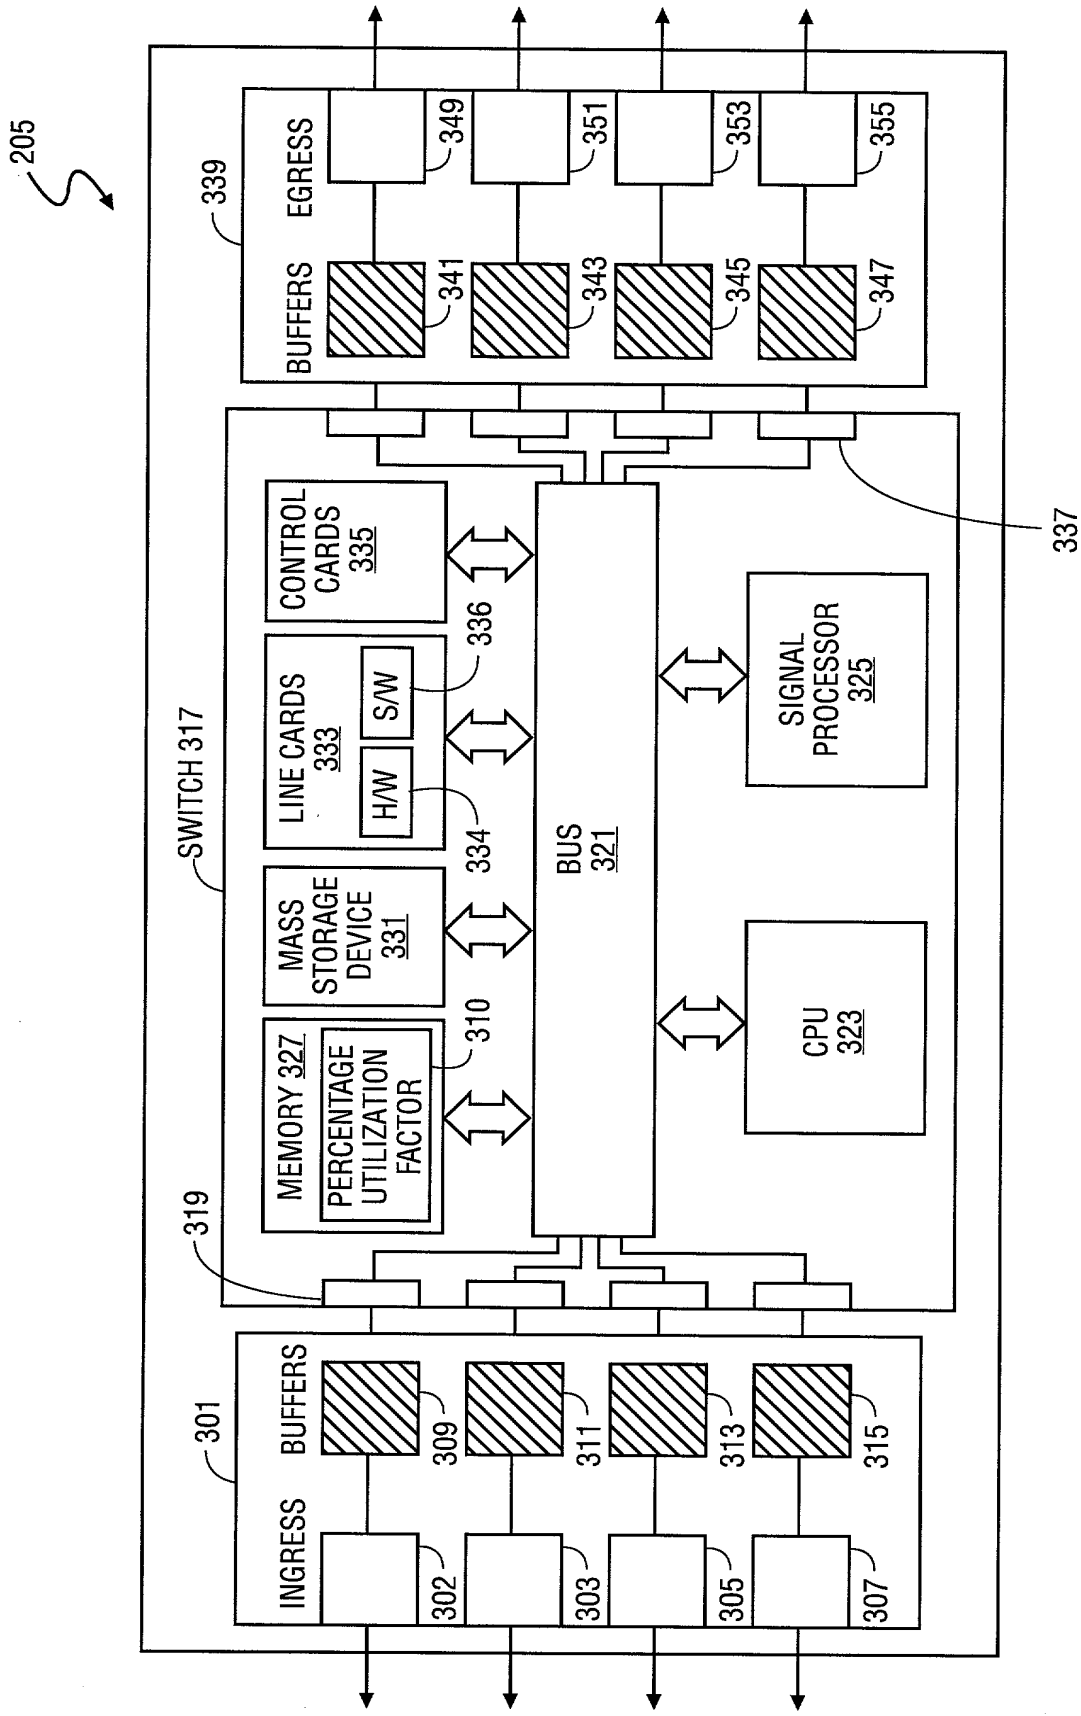


FIG. 3

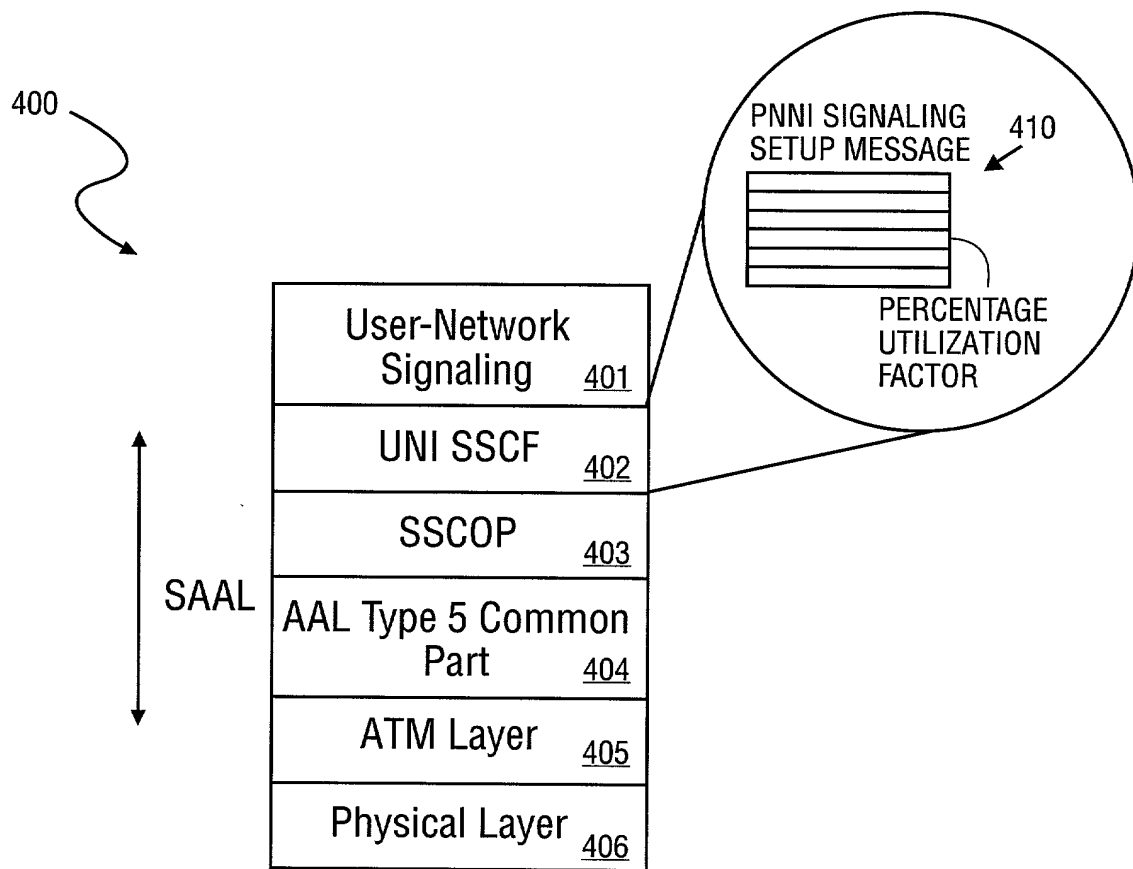

*ATM signaling protocol stack*

FIG. 4

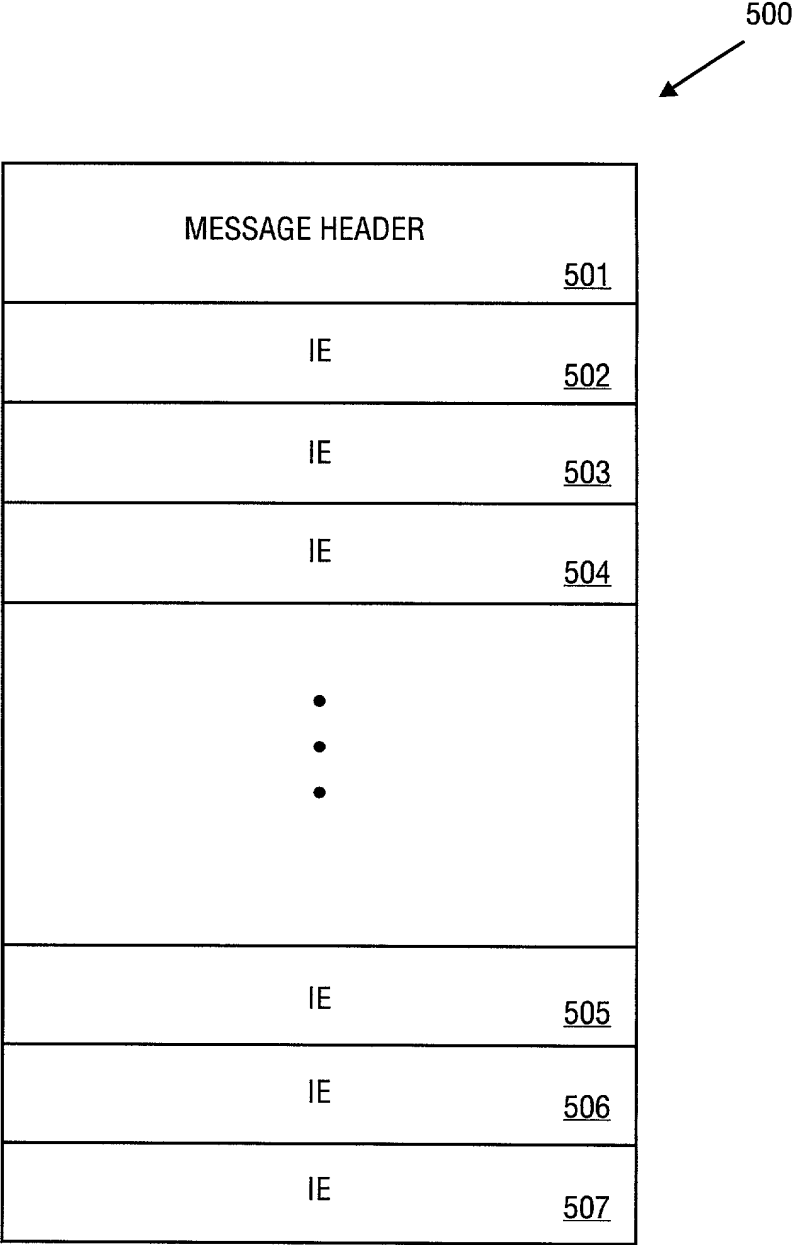


FIG. 5

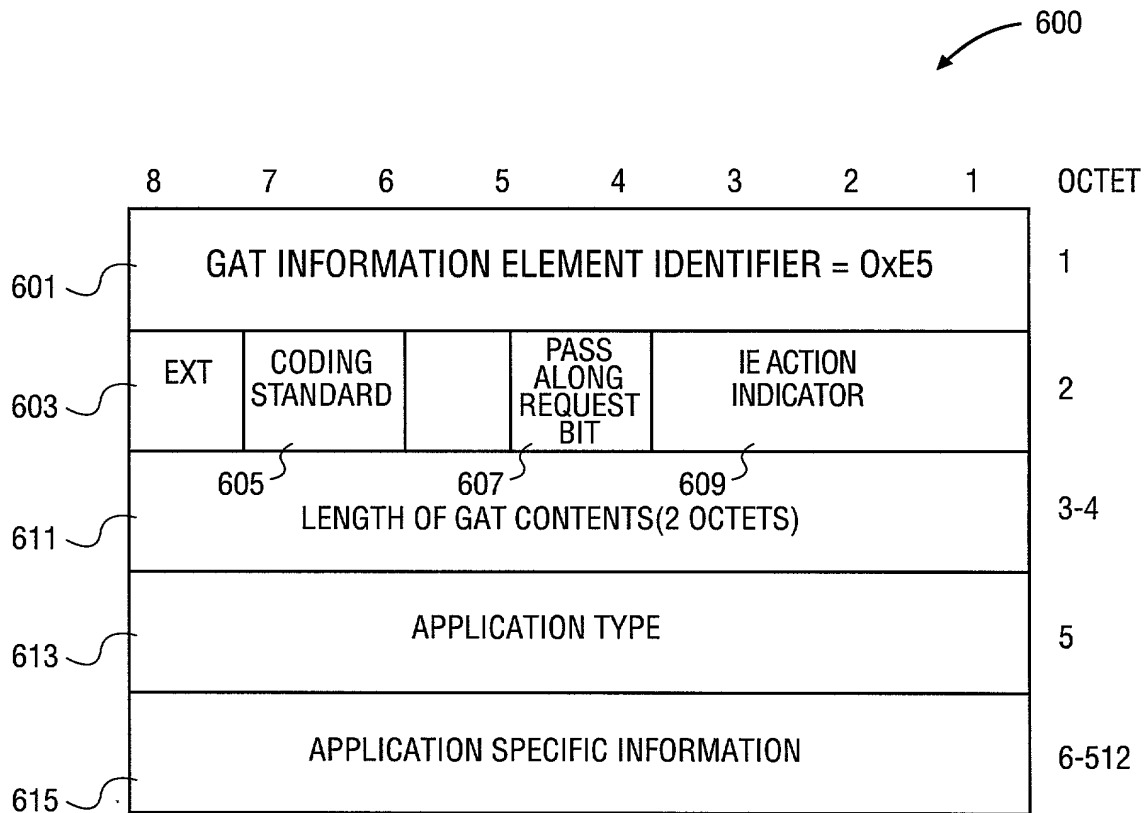


FIG. 6

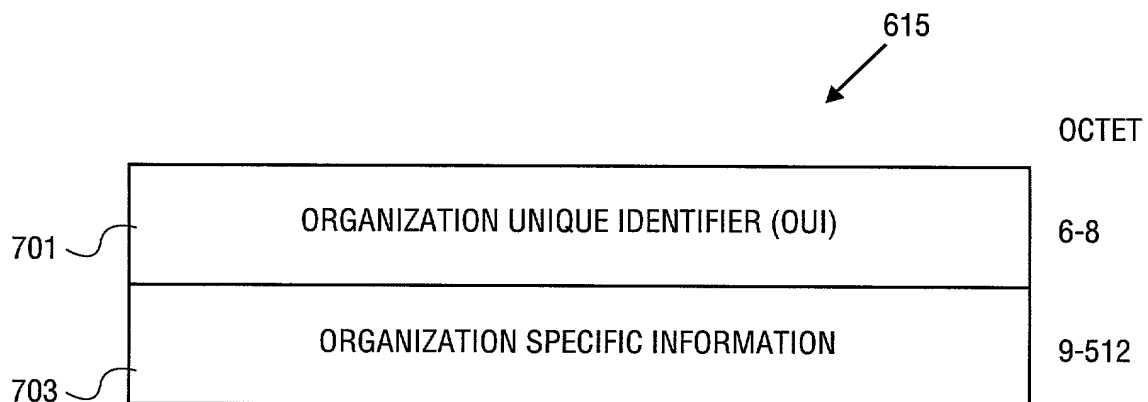


FIG. 7

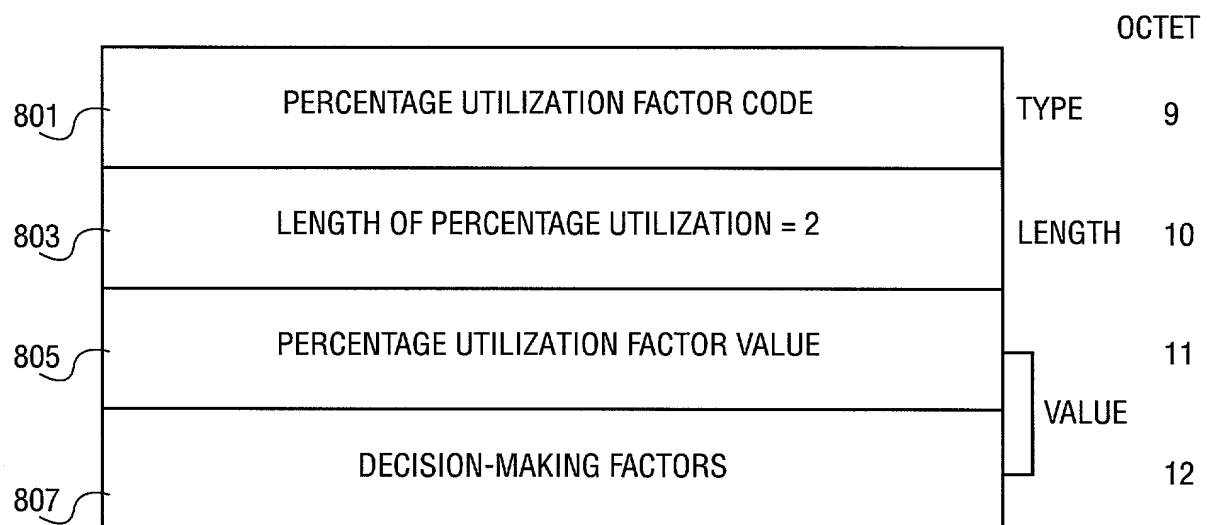


FIG. 8

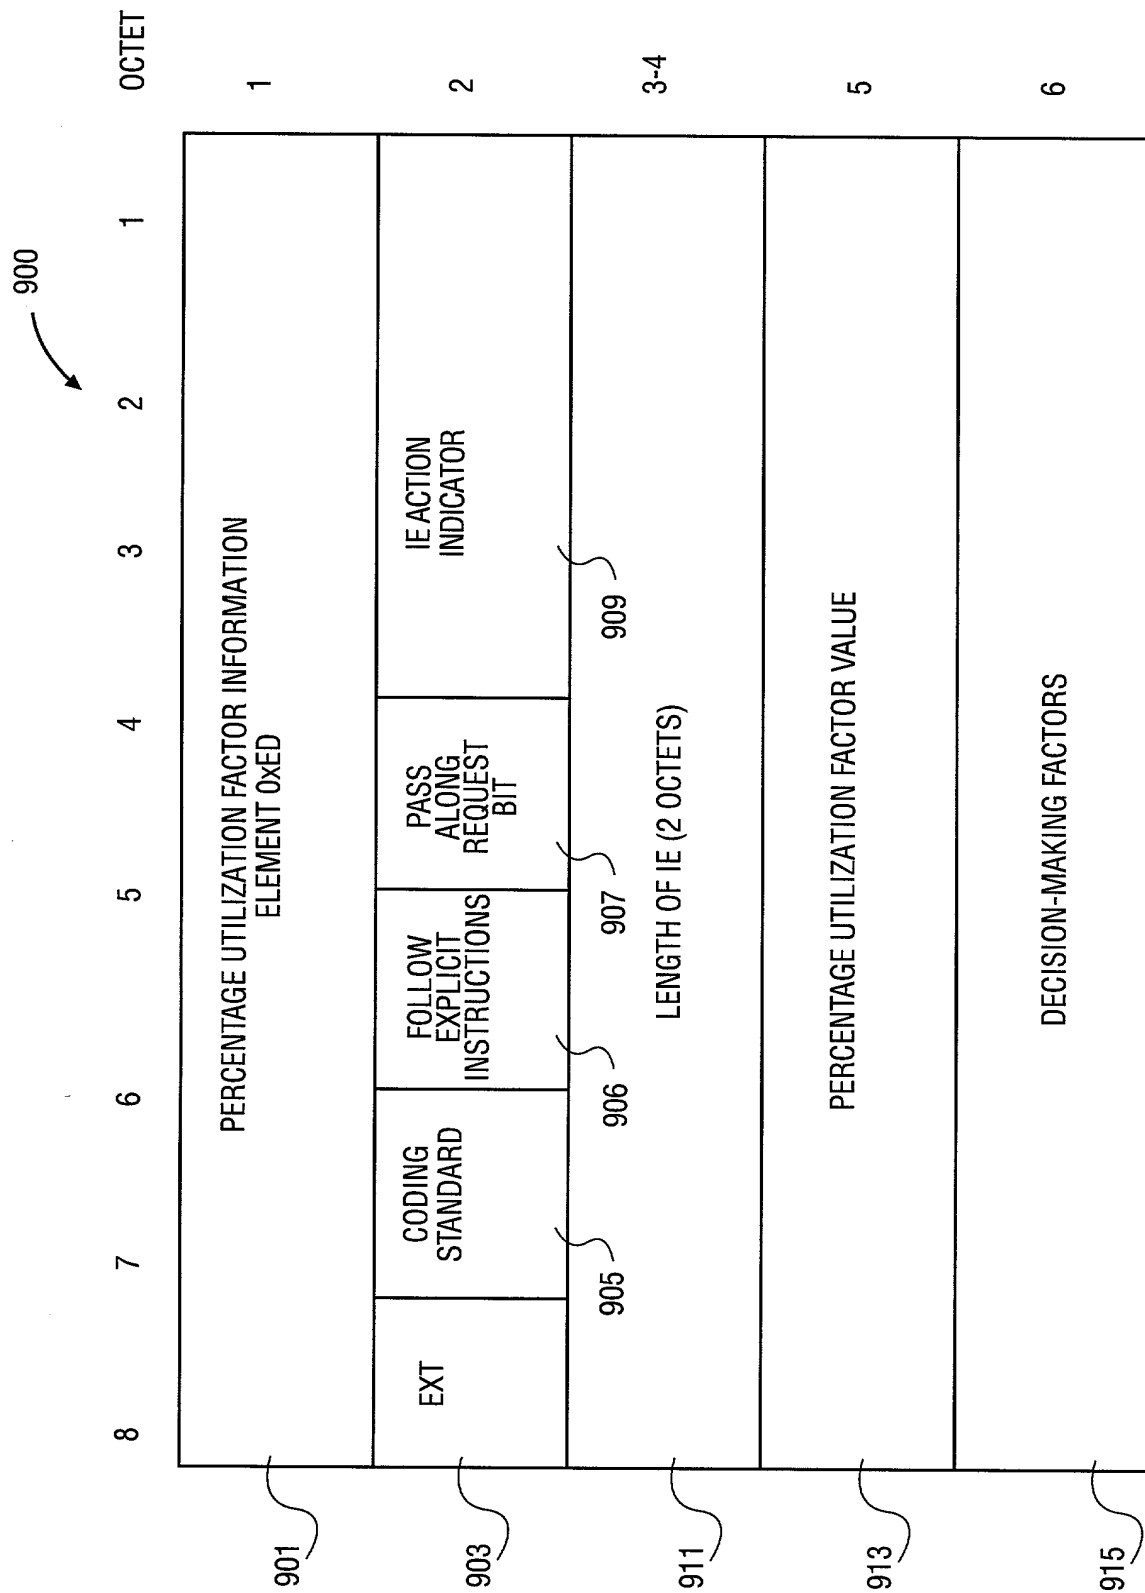


FIG. 9



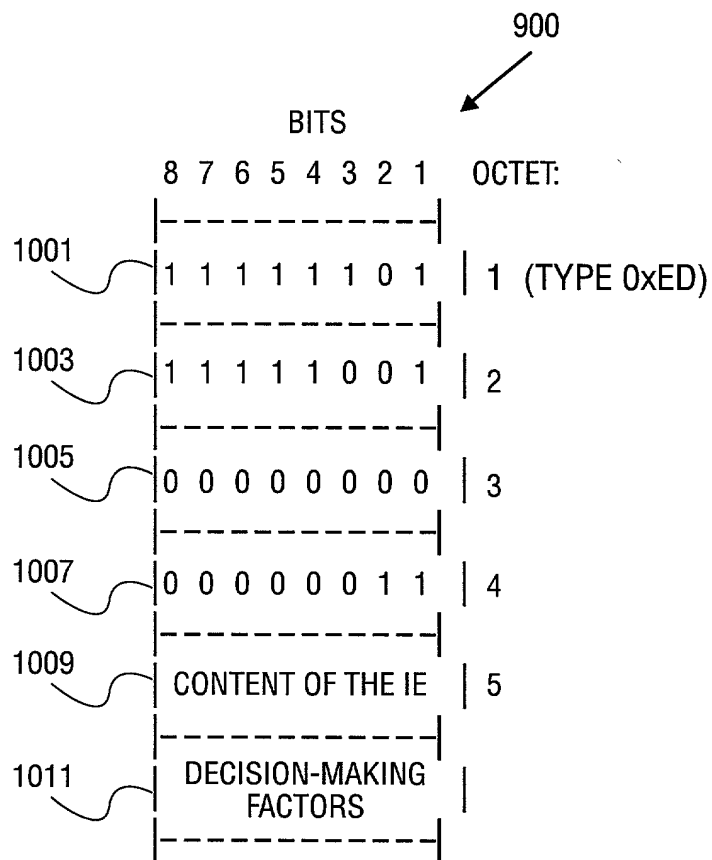


FIG. 10

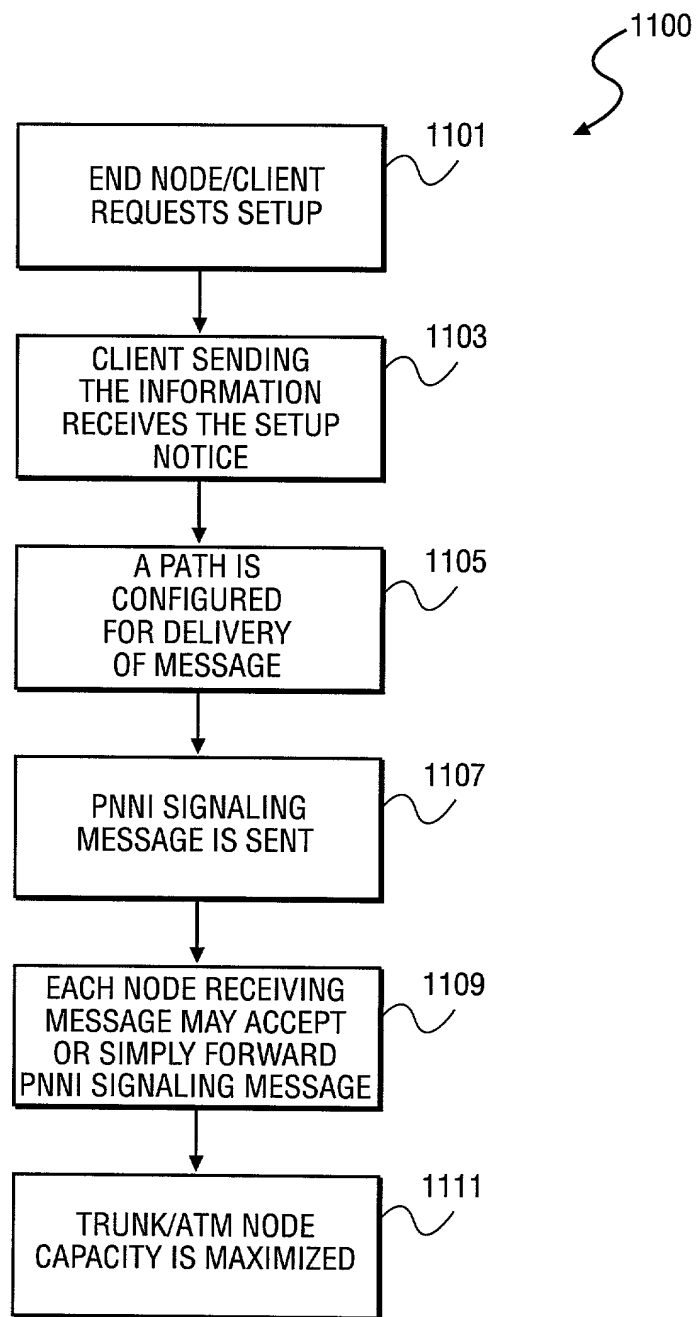


FIG. 11